




CLR700WDR CAMERA




3D DNR/Digital WDR

- Super High Resolution of 550 TV Lines
- Unmatched low light sensitivity of 0.05 LUX/F2.0
- Ultra compact size of 31mm(W)x30mm(H)

Signal Format	NTSC	PAL
Image Device	1/3" Sony Super HAD CCD II	
Total Pixels	811(H) x 508(V) approx. 410K pixels	795(H) x 596(V) approx. 470K pixels
Effective Pixels	768(H) x 494(V) approx. 380K pixels	752(H) x 582(V) approx. 440K pixels
Inter. H/V	15,734/59.94Hz	15,625/50Hz
H.Resolution	More than 550TV Lines	
Minimum illumination	0.2Lux / F2.0	
S/N Ratio	More than 50dB(AGC Off)	
Electronic Shutter	1/60 ~ 1/100,000 sec	1/50 ~ 1/100,000 sec
Manual Shutter	1/60(50), 1/100(120), 1/250, 1/500, 1/2K, 1/5K, 1/10K, 1/100K X2, X4, X8, X16, X32, X64, X128, X256	
Sense-up	X2, X4, X8, X16, X32, X64, X128, X256	
AGC	Off/Low/Middle/High	
White Balance	ATW / PUSH / PUSH-LOCK / MANUAL / Indoor / Outdoor	
Sync System	Internal	
Privacy Zone	8 Zone	
Flickerless	OFF/ON	
Lens	Board Lens, Pinhole Lens	
Etc.	Motion Detection, 3DNR, Mirror(H,V,H/V), Digital Zoom, Freeze, Negative Image, BLC, D-WDR, RS-485	
Video Output	CVBS	
Input Power Source	DC12V ±10% Max 120mA	
Operating Temperature	-10°C ~ +50°C	

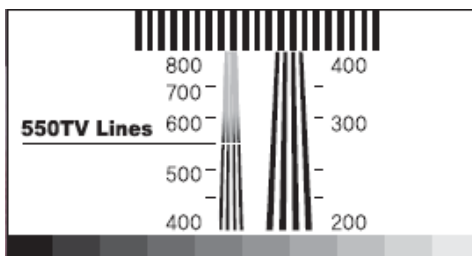

Test Chart

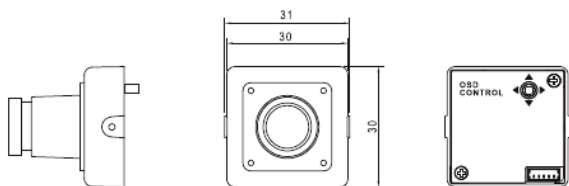

Dimension




Normal

BLC

WDR on

D-WDR (Wide Dynamic Range)

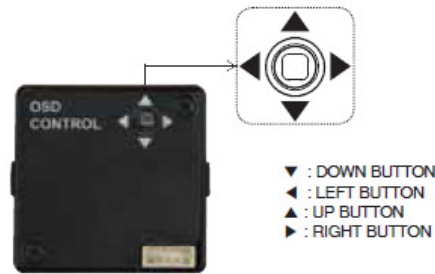

Rear View

- ▼ : DOWN BUTTON
- ◀ : LEFT BUTTON
- ▲ : UP BUTTON
- ▶ : RIGHT BUTTON